

Guard_S Compact Series

LINE-INTERACTIVE UPS

Uninterruptible Power System

600VA / 800VA

USER MANUAL



inform

IMPORTANT SAFETY INSTRUCTIONS

WARNING : (SAVE THESE INSTRUCTIONS) This manual contains important safety instructions. Please follow up all instructions carefully during installation. Read this manual thoroughly before attempting to unpack, install or operate.

CAUTION : To prevent the risk of fire or electric shock, please install the unit in a temperature and humidity controlled indoor area, which is free of conductive contaminants.

CAUTION : risk of electric shock, do not remove the cover. No user serviceable parts. Refer servicing to qualified service personnel.

CAUTION : Risk of electric shock. Hazardous live parts inside this UPS can be energized from the battery supply even when the input AC power is disconnected.


CAUTION : Risk of electric shock. Battery Circuit is not isolated from AC input, hazardous voltage may exist between battery terminals and ground. Please test it before touching.

NOTICE: The UPS is designed for computer loads only.

1) INSPECTION


Inspect the UPS upon receipt. Notify the carrier and dealer if there is damage. The package is recyclable; save it for reuse or dispose of it properly.

2) PLACEMENT

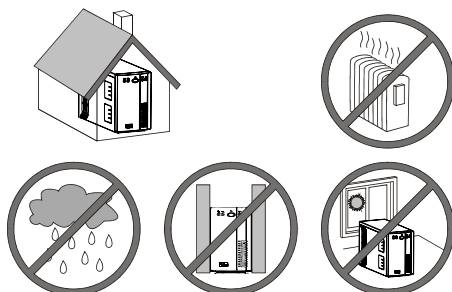

3) LOAD CONNECTION


First, connect the UPS with the AC Mains, then plug the loads into the output connectors on the rear of the UPS. To use the UPS as a master “On/Off” switch, make sure that all of the loads are switch “On”.

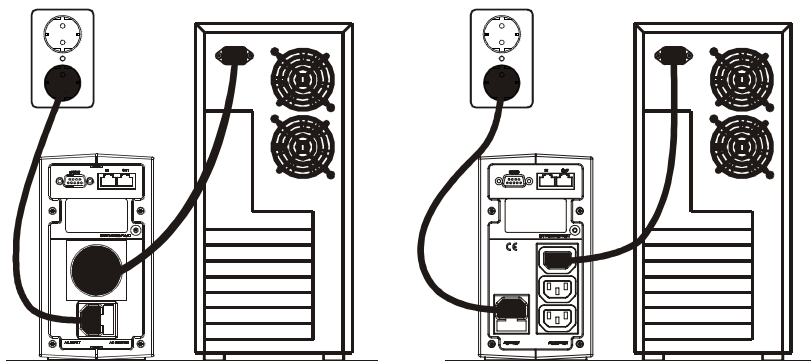

Caution: Do not connect a laser printer to the outlets. These UPS’s outlets provide battery power and surge protection to the equipment when utility voltage is outside acceptable limits.

4) CONNECTION OF TELEPHONE/NETWORK SURGE PROTECTION (ONLY AP MODELS)

Connect a single line telephone or a 10 base-T / 100 base-T network cable into the RJ-45 / RJ-11 telephone / network surge protection “IN” jack on the back of the UPS. Connect from the “OUT” jack with telephone cable (supplied) or network cabling (not supplied) to a fax modem or network port.

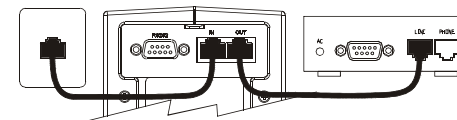

5) OPERATION TEST

1. Connect the UPS to the wall receptacle.
2. Push on the Main Switch to check the Green Line (∞) LED is on.
3. Connect your computer equipment with sockets of the UPS and pull off the input power cable of the UPS from the wall receptacle to check if the Line (∞) LED is flashing every 3 seconds. Meanwhile, please check if alarm buzzer is beeping.
4. Try the field working condition by running some application programs on your computer and repeating step.
5. Check if the UPS is initiated properly to support continuous operation.


6. IMPORTANT NOTICE: Plug the UPS into the wall outlet to charge the UPS for over 8 hours before using the UPS.

7. STORAGE:

Store at -15 to +30 °C (+5 to +86 °F), charge the UPS battery every six months.

Store at +30 to +45 °C (+86 to +113 °F), charge the UPS battery every three months

6) FRONT PANEL EXPLANATIONS

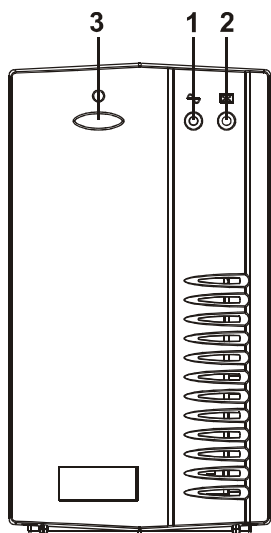

1. Line LED (⎓):

Green LED remains standstill when Utility is normal.

Green LED flashes every 3 seconds and simultaneously buzzer alarm is noticed continuously during Utility failure.

Green LED flashes every 3 seconds when the UPS is in Battery charging mode and flashes every 0.5 seconds and buzzer alarms every 0.5 seconds in battery low condition.

Green LED remains standstill and simultaneously buzzer alarms continuously when the UPS is in overload condition.

2. Check Battery LED (⎓):

Red LED remains standstill when the Battery is failure

3. Main Switch:

- To Control on/off the UPS when Utility is normal.
- To enable "DC-Start" Function when Utility fails. (To enable DC Start properly, you are recommended to connect <80% output load with the UPS only)

P.S. Make sure the computer connected to the UPS is switched on before enable the "DC-Start" function. You are not recommended to add some other computer or peripherals after DC-Start function is activated.

7) REAR PANEL EXPLANATIONS

1. AC Inlet

2. Backup Outlets: 1pc Schuko or 3pcs IEC 320


3. AC Fuse Holder. (VA/fuse)

4. Computer Interface:


True RS232 communication port. (AP Models only)

5. RJ11/RJ45 Jacks:

MODEM /LAN Protection. (AP Models only)

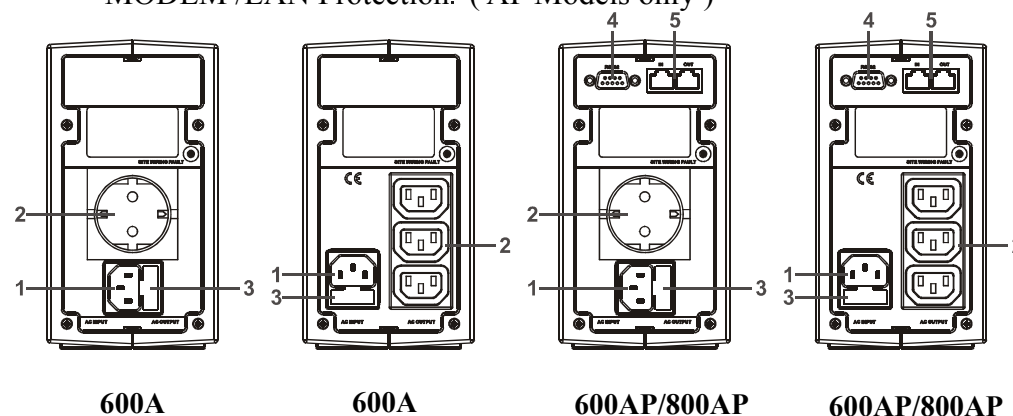

8) REPLACING BATTERY

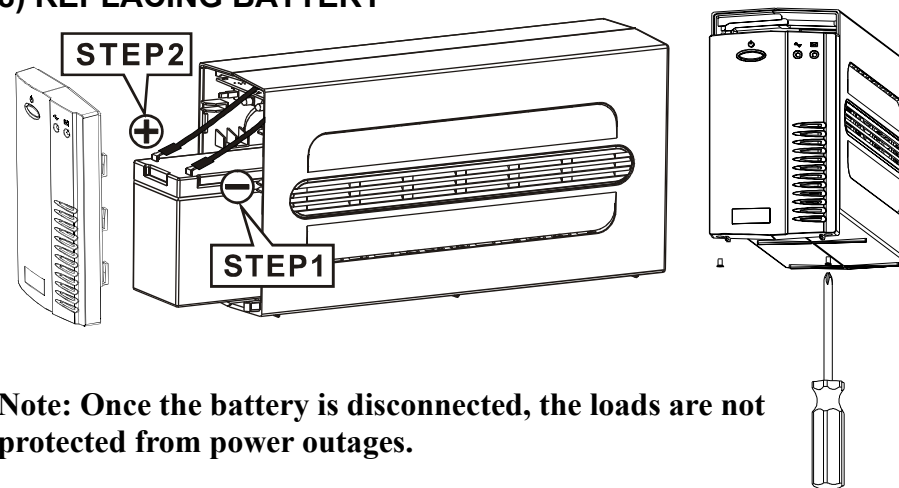

Note: Once the battery is disconnected, the loads are not protected from power outages.

1. Use a cross-type screwdriver to remove the two front panel screws and slide down the panel.
2. Gently Pull the battery out of the UPS.
3. Loosen the black wire from the negative (-) terminal and red wire from the positive (+) terminal.
4. Connect the battery leads to the new battery.
5. Note: Small sparks at the battery connectors are normal during connection.
6. Slide the battery into the UPS.
7. Close the front panel and fasten two screws.
8. Dispose of the old battery properly at an appropriate recycling facility.

9) TROUBLE SHOOTING

When your UPS malfunctions during operation, you may check the list below for proper adjustment. If the adjustment still be in vain, please contact your sales agent for help.

Situation	Check Items	Solution
Mains normal but 'Line' LED is not on.	1. Is the power switch on? 2. Is the fuse in order? 3. Is the power cord loose?	1. .Press Main Switch on. 2. Change fuse w/same rating. 3. Re-connect the power cord properly.
'Line' LED flashes every second but no output	Battery voltage is too low	Recharge the UPS for 24 hours.
Alarm buzzer beeps continuously when Utility is normal.	Check to see load status if it is in overload.	Remove some uncritical load.
Alarm buzzer beeps for 10 seconds, then the UPS is turned off		Remove some uncritical load and re-switch on the UPS.
No LEDs display on the front panel		Consult with your sales agent For help.
UPS dose not provide expected back up time.	1. The UPS's battery is weak due to recent outage. 2. The UPS's battery is near the end of its service life.	1. Charge the battery. 2. If the battery is near the end of its service lift, consider replacing the battery.
UPS switch on then connect Utility, but UPS is unable to work under Utility mode	Is the Utility normal?	If Utility is normal, connect Utility first then restart UPS.



192321932026001